

First Solar FS Series 2 PV Module

Thin film solutions for high performance PV systems

First Solar® FS Series 2™ PV Modules are IEC 61646 and IEC 61730 certified for use in systems up to 1000 VDC, and meet the requirements of Safety Class II. First Solar provides cost effective thin film module solutions to leading solar project developers and system integrators for large scale, grid-connected solar power plants. First Solar application engineers provide technical support and comprehensive product documentation to support the design, installation, and long term operations of high performance PV systems.



WARRANTY

- Material and workmanship warranty for five (5) years and a power output warranty of 90% of the nominal output power rating ($P_{MPP} \pm 5\%$) during the first ten (10) years and 80% during twenty-five (25) years subject to the warranty terms and conditions.
- Modules are life cycle managed with a collection and recycling program, providing module owners with no cost, pre-funded, end-of-life take back, and recycling of the modules.

For applications in North America please refer to the NA datasheet (PD-5-401-02 NA).

First Solar (Europe)
Tel: +800 3757 3757
info@firstsolar.de

First Solar (US)
Tel: 877 850 3757
info@firstsolar.com

www.firstsolar.com

PD-5-401-02 MAY 2011


The First Solar logo, First Solar™, and all products denoted with ® are registered trademarks, and those denoted with a ™ are trademarks of First Solar, Inc.

ELECTRICAL SPECIFICATIONS

MECHANICAL DRAWING

MODEL NUMBERS AND RATINGS AT STC ^{1*}						
Nominal Values		FS-270	FS-272	FS-275	FS-277	FS-280
Nominal Power(+/-5%)	P _{MPP} (W)	70	72.5	75	77.5	80
Voltage at P _{MAX}	V _{MPP} (V)	65.5	66.6	68.2	69.9	71.2
Current at P _{MAX}	I _{MPP} (A)	1.07	1.09	1.10	1.11	1.12
Open Circuit Voltage	V _{OC} (V)	88.0	88.7	89.6	90.5	91.5
Short Circuit Current	I _{SC} (A)	1.23	1.23	1.23	1.22	1.22
Maximum System Voltage	V _{SYS} (V)	1000				
Temperature Coefficient of P _{MPP}	T _K (P _{MPP})	-0.25%/°C				
Temperature Coefficient of V _{OC} , high temp (>25°C)	T _K (V _{OC, high temp})	-0.25%/°C				
Temperature Coefficient of V _{OC} , low temp (-40°C to +25°C)	T _K (V _{OC, low temp})	-0.20%/°C				
Temperature Coefficient of I _{SC}	T _K (I _{SC})	+0.04%/°C				
Limiting Reverse Current	I _R (A)	2				
Maximum Series Fuse	I _{CF} (A)	2				

MODEL NUMBERS AND RATINGS AT 800W/m ² , NOCT ² 45°C, AM 1.5*						
Nominal Values		FS-270	FS-272	FS-275	FS-277	FS-280
Nominal Power(+/-5%)	P _{MPP} (W)	52.5	54.4	56.3	58.1	60.0
Voltage at P _{MAX}	V _{MPP} (V)	61.4	62.4	63.9	65.5	66.8
Current at P _{MAX}	I _{MPP} (A)	0.86	0.87	0.88	0.89	0.90
Open Circuit Voltage	V _{OC} (V)	81.8	82.5	83.3	84.2	85.1
Short Circuit Current	I _{SC} (A)	1.01	1.01	1.01	1.00	1.00

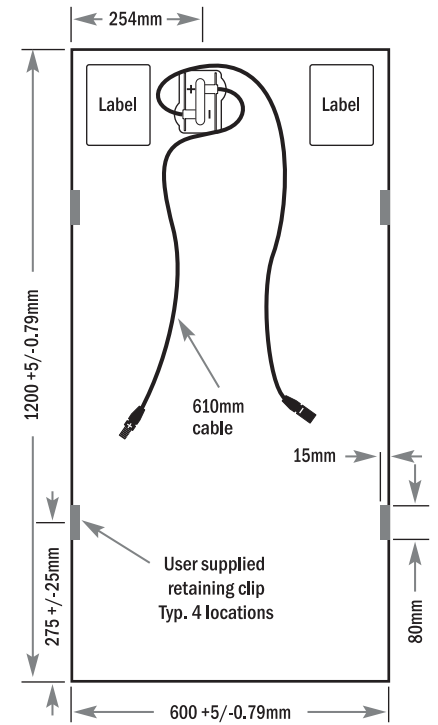

* All ratings +/-10%, unless specified otherwise. Specifications are subject to change.

¹ Standard Test Conditions (STC) 1000W/m², AM 1.5, 25°C

² Nominal Operating Cell Temperature: Module operation temperature at 800W/ m² irradiance, 20°C air temperature, 1m/s wind speed.

MECHANICAL DESCRIPTION

Length	1200mm	Thickness	6.8mm
Width	600mm	Area	0.72m ²
Weight	12kg	Leadwire	4.0mm ² , 610mm
Connectors	Solarline 1 type connector		
Bypass Diode	None		
Cell Type	CdS/CdTe semiconductor, 116 active cells		
Frame Material	None		
Cover Type	3.2mm heat strengthened front glass laminated to 3.2mm tempered back glass		
Encapsulation	Laminate material with edge seal		

High Performance PV System Solutions

Key Features:

- Produces high energy output across a wide range of climatic conditions with excellent temperature response coefficient
- Proven to perform as predicted with a high Performance Ratio (PR)
- Frameless laminate is robust, cost-effective and recyclable, and does not require module grounding
- Manufactured in highly automated, state-of-the-art facilities certified to ISO 9001:2008 and ISO 14001:2004 quality and environmental management standards
- Tested by leading international institutes and certified for reliability and safety:

- Certified to IEC 61646
- Certified to IEC 61730
- CE Marking
- Safety Class II @ 1000 V



www.firstsolar.com

FS Series 2 PV Module
PD-5-401-02 MAY 2011